



LED RGB FLOODLIGHT
WITH REMOTE CONTROL



FL5210 RGB Light RGB



FL5212 RGB Light RGB



FL5233 RGB Light RGB

	10W SMD FLOODLIGHT RGB	30W SMD FLOODLIGHT RGB	50W SMD FLOODLIGHT RGB
Model No.	FL5210	FL5212	FL5233
Watts	10W	30W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	800 lm	2400 lm	4000 lm
Beam Angle	120°	120°	120°
Light Color	RGB	RGB	RGB
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	120x120x35 mm	167x167x35 mm	220x220x35 mm

EAN Code RGB 3800156652101

3800156652125

3800156652330



LED SMD FLOODLIGHT
RECHARGEABLE



FL5406 Neutral Light 4500K



CAR CHARGER INCLUDED




FL5407 Neutral Light 4500K

	10W SMD FLOODLIGHT RECHARGEABLE	20W SMD FLOODLIGHT RECHARGEABLE
Model No.	FL5406	FL5407
Watts	10W	20W
Input Voltage	AC:220-240V	AC:220-240V
Flux	800 lm	1600 lm
Beam Angle	120°	120°
Light Color	NW	NW
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	115x85x105 mm	180x140x120 mm

EAN Code 4500K

3800156654068

3800156654075

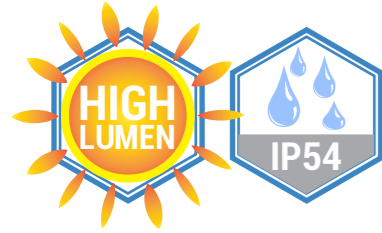

LED INDUSTRIAL LIGHT
HIGH BAY



30W



HB8122 White Light 6000K

55W



HB8123 White Light 6000K

100W



HB8124 White Light 6000K

150W



HB8125 White Light 6000K

	30W HIGH-BAY	55W HIGH-BAY	100W HIGH-BAY	150W HIGH-BAY
Model No.	HB8122	HB8123	HD8124	HB8125
Watts	30W	55W	100W	150W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	2400 lm	4400 lm	10 000 lm	15 000 lm
Beam Angle	90°	90°	60°	60°
Light Color	WH	WH	WH	WH
CRI	>80	>80	>80	>80
IP Rating	IP54	IP54	IP54	IP54
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ335mm-H262mm	φ435mm-H295mm	φ402mm-H349mm	φ410mm-H353mm

EAN Code 5700K 3800156681224 3800156681231 3800156681248 3800156681255

LED TUNNEL LIGHT



90W



SL9154 Neutral Light 5700K

120W



SL9152 Neutral Light 5700K

150W



SL9150 Neutral Light 5700K

180W



SL9153 Neutral Light 5700K

	90W TUNNEL LIGHT	120W TUNNEL LIGHT	150W TUNNEL LIGHT	180W TUNNEL LIGHT
Model No.	SL9154	SL9152	SL9150	SL9153
Watts	90W	120W	150W	180W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	7500 lm	10000 lm	12500 lm	15000 lm
Beam Angle	150°	150°	150°	150°
Light Color	Neutral Light	Neutral Light	Neutral Light	Neutral Light
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	35 000 h	35 000 h	35 000 h	35 000 h
Dimension	L319×W280×H155mm	L403×W280×H155mm	L671×W271×H188mm	L571×W280×H155mm

EAN Code 5700K 3800156691544 3800156691520 3800156691506 3800156691537